

PREFINISHED SPLIT FRAME

REDUCE JOBSITE COORDINATION AND TIME


de La Fontaine has combined its expertise, experience and innovation to develop an exclusive and patented welded split frame available in a variety of configurations. Its design features—including a state-of-the-art anchoring system and sandwich structure—yield an accurate fit with a range of wall conditions and constructions. The result: a solid, strong and secure opening.

In addition, our unique split frame comes prefinished from the factory for installation at the end of the construction cycle, which reduces the time spent on coordination and installation.

Let us prove it to you on your next construction project.



Different configurations available

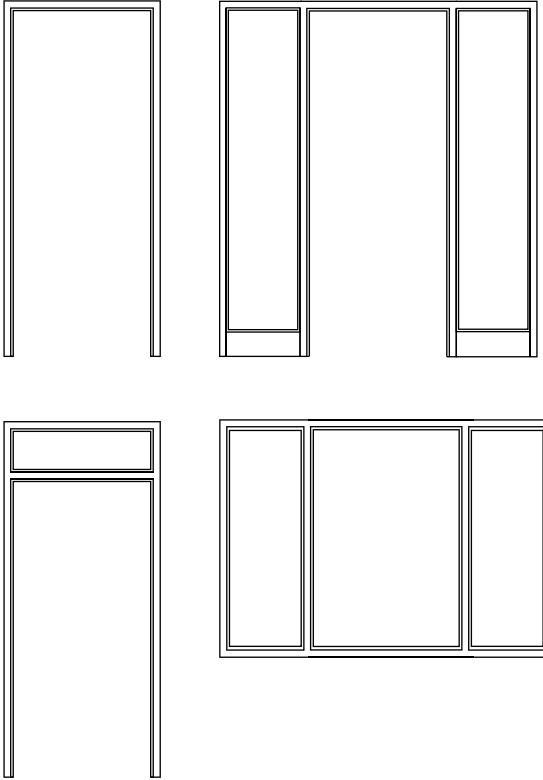

BENEFITS:

End Users:

- Durable opening with less maintenance.
- Ease of compliance with the annual fire door inspection mandated by NFPA 80, 2007 edition.

Architects:

- Factory prefinished products.
- Lack of field VOC's.
- Certified installers.

Contractors:

- Installation can start once the walls have been painted.
- Factory prefinishing considerably reduces coordination and time spent on the jobsite.
- One sole responsibility for the complete opening.


Distributors:

- The frame, door and hardware can be assembled before shipping to the jobsite to ensure functionality of the opening.
- Fewer trips to the opening.
- Adjustability suitable for retrofit application.
- Ready for shipment within 4 weeks once the complete information has been received.

This product requires installers to be certified by de La Fontaine. Please communicate with us for more details.

SPECIFICATIONS:

- Materials: A40 and A60 galvanized steel.
- Steel gauge: 16-gauge (0.056", 1.4 mm).
- Configurations: Single-frame, double-frame, sidelite, transom and borrowed lite.
- Assembly: Two face-welded components.
Wall anchors.
Mullion locating pin provided with sidelite.
- Hardware reinforcement:
 - 10-gauge (0.129", 3.3 mm) high-frequency hinge reinforcement.
 - 16-gauge (0.056", 1.4 mm) strike reinforcement.
 - 16-gauge (0.056", 1.4 mm) door-closer reinforcement.
- Prefinish: Waterborne paint for galvanized steel.
High quality and durable finish that exceeds ANSI A250.3.
Standard and custom colors.
- Fire rating: 90-minute (positive pressure; UL 10C).
Maximum overall dimensions:
10'3/4" x 8'2" (3067 mm x 2489 mm).
- Exceeds American National Standards Institute ANSI A250.4.
- LEED: Our steel is comprised of 31.2% recycled steel (post-consumer: 24.6%; post-industrial: 6.6%).

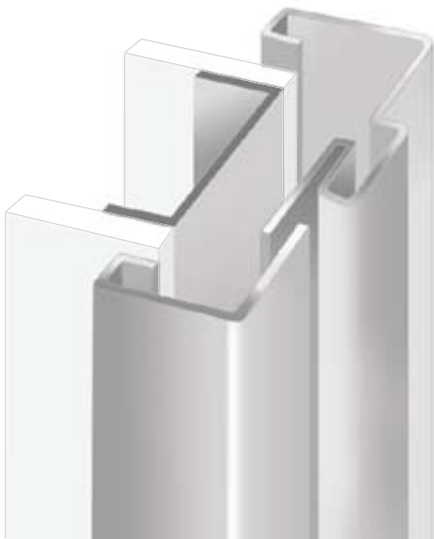

Patent pending product

*For additional technical information, please contact us.